


HT-110

DIGITAL TIRE INFLATOR



(Remark : Above posts are options)

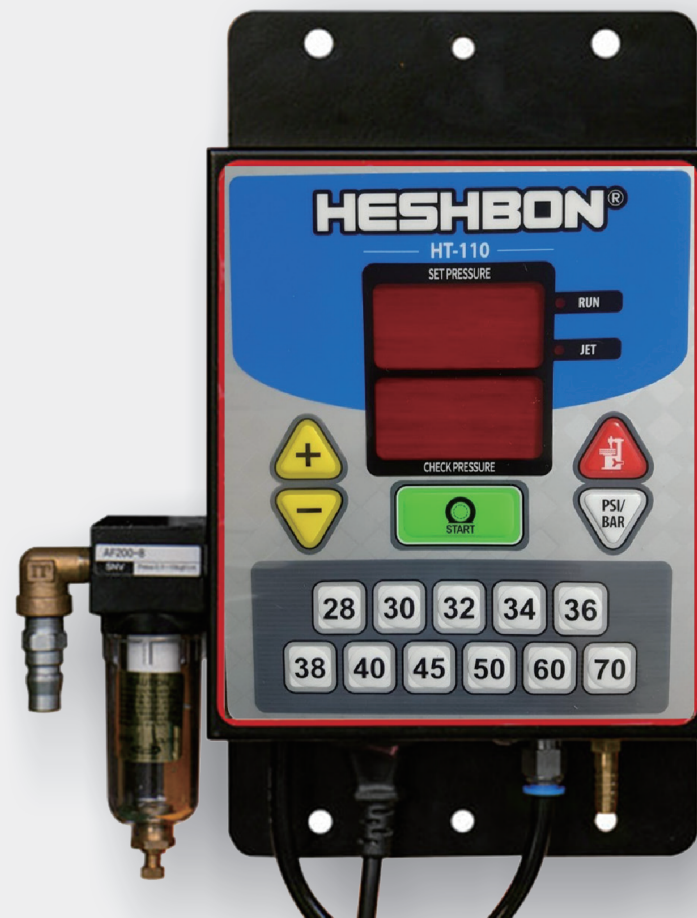

SPECIFICATION

Setting pressure	10 ~ 120 psi
Supplied air pressure	8 ~ 10 kg/cm2
Initial setting pressure	32 psi
Accuracy	±1 psi
Alarm system	Buzzer
Dimension	240(W) x 300(L) x 70(H)
Power	220V 50/60Hz

FEATURE

- Initial setting conversion function.
- Automatically inject and discharge the desired air amount.
- Extend tire life.
- Easy to install and can be installed in a small space
- Tire fine punk can be checked.
- Tire bead seating
- Simple setting of pressure.



HT-115

DIGITAL TIRE INFLATOR



(Remark : Above posts are options)

FEATURE

- Voice function to speak work process.
- Initial setting conversion function.
- Automatically inject and discharge desired air amount.
- Extend tire life.
- Easy to install and can be installed in a small space.
- Tire fine punk can be checked.
- Tire bead seating.
- Built-in buzzer sound adjustment function.
- Simple setting of pressure.
- Built-in 4-wheel air pressure check function.

SPECIFICATION

Setting pressure	10 ~ 120 psi
Supplied air pressure	7 ~ 9 kg/cm2
Initial setting pressure	32 psi
Accuracy	±1 psi
Alarm system	Voice
Dimension	185(W) x 415(L) x 105(H)
Power	220V 50/60Hz

HESHBON PRODUCT

DIGITAL TIRE INFLATOR

MODEL NO.


HT-115

HT-160

DIGITAL TRUCK TIRE INFLATOR



(Remark : Above posts are options)

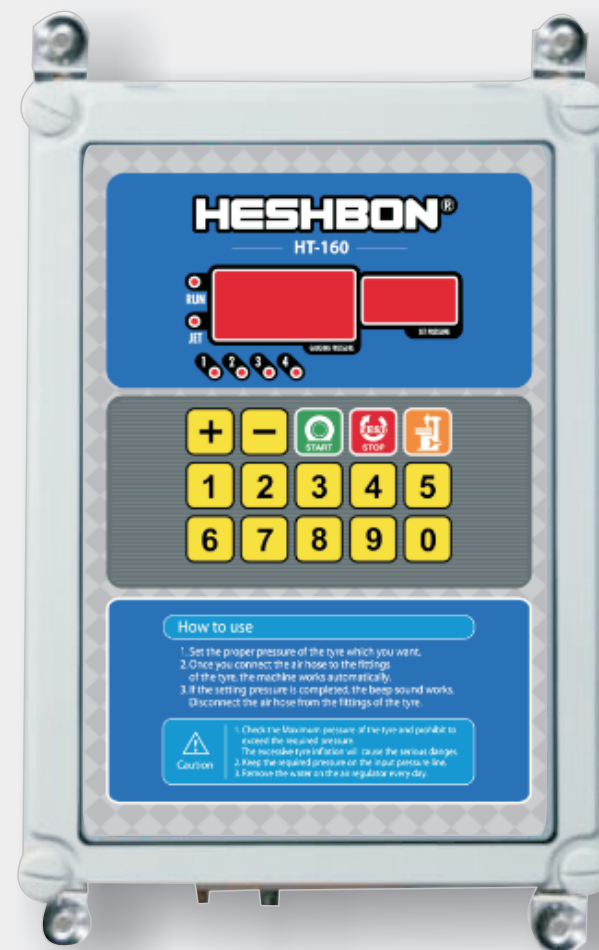

SPECIFICATION

Setting pressure	10 ~ 160 psi
Supplied air pressure	13 ~ 15 kg/cm ²
Initial setting pressure	32 psi
Accuracy	±1 psi
Alarm system	Buzzer
Dimension	250(W) x 380(L) x 110(H)
Power	220V 50/60Hz

FEATURE

- Initial setting conversion function.
- Automatically inject and discharge the desired air amount.
- Extend tire life.
- Easy to install and can be installed in a small space
- Tire fine punk can be checked.
- Tire bead seating
- Simple setting of pressure.
- Built-in anti-freeze heater.



HT-1200

DIGITAL TIRE INFLATOR WITH COMPRESSOR



(Remark: Air compressor equipped)

HESHBON PRODUCT

DIGITAL TIRE INFLATOR

MODEL NO.
HT-1200

FEATURE

- Voice function to speak work process.
- Initial setting conversion function.
- Air compressor equipped.
 - No need air equipment connection work.
 - Possible to install in narrow space.
- Power cut-of function. (After 15 seconds operation)
- User can easily check how to operate by QR code.
- Automatically inject and discharge desired air amount.

SPECIFICATION

Setting pressure	10 ~ 100 psi
Supplied air pressure	8 ~ 10 kg/cm2
Initial setting pressure	32 psi
Air compressor	2HP 7L
Accuracy	±1 psi
Alarm system	VOICE
Dimension	220 (W) x 400 (L) x1510 (H)